

General information

Phone _____

New equipment

Retrofit

Company _____

Contact person _____

Email _____

Intended use _____

Quantity _____

Measurement range

Accuracy

Operating temperature

Explosion protection



Nominal load _____

Max. load _____ Breaking load _____

Measurement range _____

Standard 0,5% FS

Standard -40...80°C


2G IIB T4

Ex i (4...20mA_2-wire only)

2G IIC T4

Ex d

Geometry

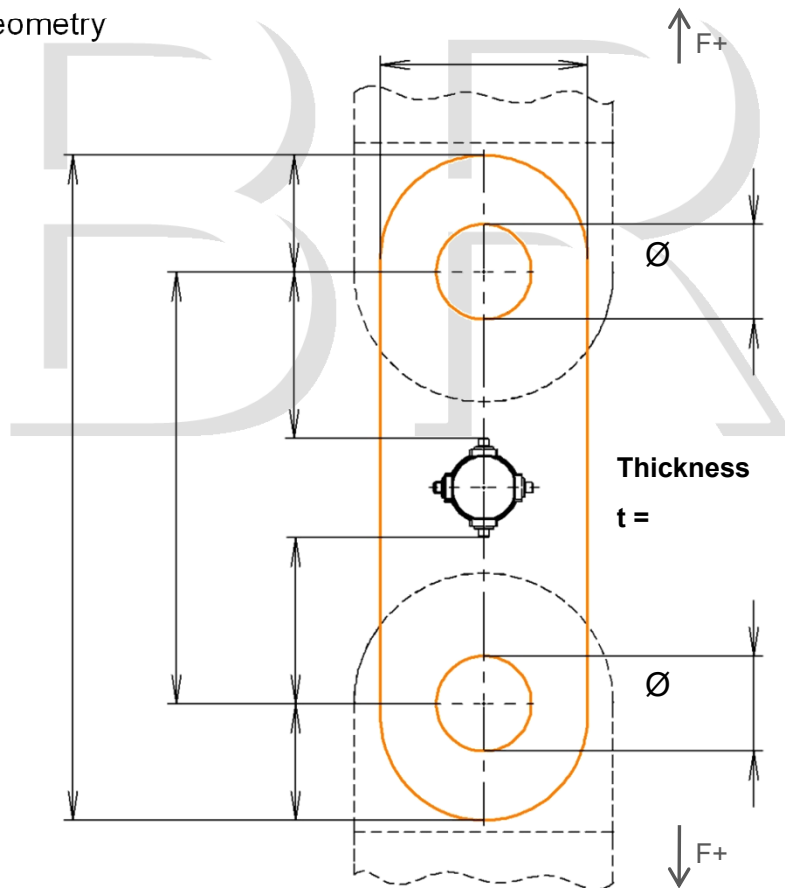

Corrosion protection

- Primed
- Continental C3
- Maritime C5m

Unless otherwise specified, all dimensions are tolerated with DIN ISO 2768-1 m (dimensions in unpainted condition).

Output signal

Output signal:

Number of channels:

Performance level:

PL c

PL d

Connection

Connector

Standard M12x1

Cable _____ m

Looped signal

(CAN In & Out)

Standard hybrid connection


Signal and supply

on separate connections

All channels on one connection if possible

One separate connection per channel

All sensors at least IP66/ 67. IP69 on request.

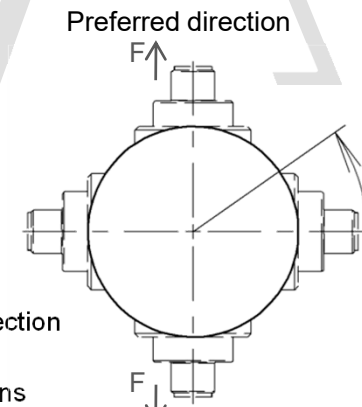

Remarks

@ Send per mail