

General information

Phone _____

New equipment
Retrofit

Quantity _____

Company _____

Contact person _____

E-mail _____

Maritime use

Intended use _____

Measurement range

Nominal load _____

Max. load _____ Breaking load _____

Measurement range _____

Accuracy

Standard 0,5% FS active
1,0% FS passive

Operating temperature

Standard -40...80°C

Explosion protection



2G IIB T4

Ex i (4...20mA_2-wire only)

2G IIC T4

Geometry

Recommended condition
for contact areas

- Roughness Rz 6,3
- Hardness >50 HRC


Pressure plates

With recommended roughness
and hardness to be included in
offer for

top side

bottom side

Indicated height is total height
including possible pressure
pieces.

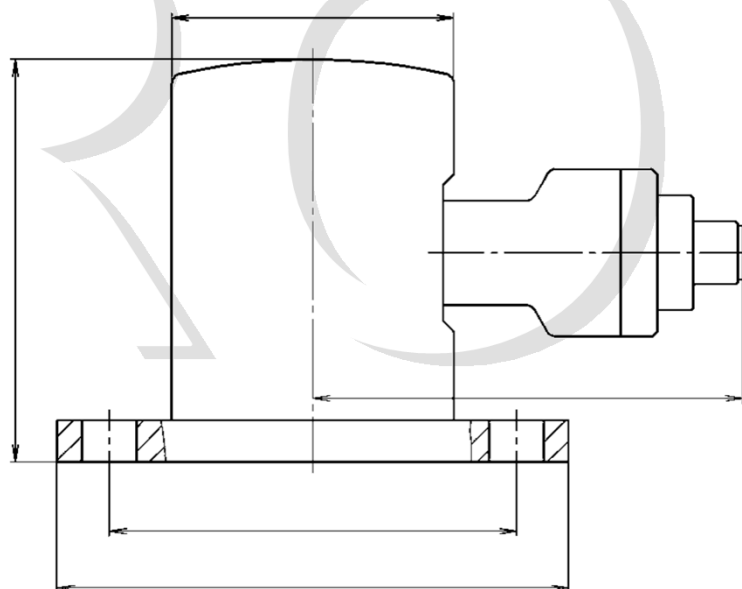

Output signal

Output signal:

Number of channels:

Performance level:

PL c

PL d

Connection

Connector

Standard M12x1

Cable _____ m

Looped signal

(CAN In & Out)

Standard hybrid connection

Signal and supply

on separate connections

All channels on one connection if possible

One separate connection per channel

All sensors at least IP66/ 67. IP69 on request.

Remarks

@ Send per
mail