

General information

Phone _____

New equipment
Retrofit

Quantity _____

Company _____

Contact person _____

E-mail _____

Maritime use

Intended use _____

Measurement range

Nominal load _____

Max. load _____ Breaking load _____

Measurement range _____

Accuracy

Standard 0,5% FS

Operating temperature

Standard -40...80°C

Explosion protection




2G IIB T4

Ex i (4...20mA_2-wire only)

2G IIC T4

Ex d

Geometry

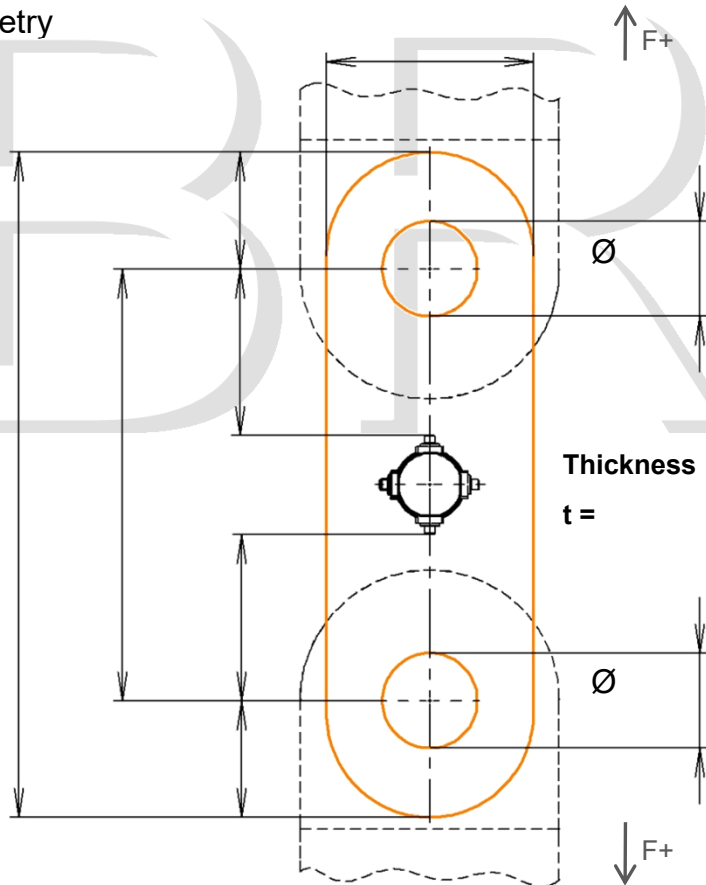

Corrosion protection

Primed
Continental C3
Maritime C5m

Unless otherwise specified,
all dimensions are tolerated with
DIN ISO 2768-1 m
(dimensions in unpainted condition).

Output signal

Output signal:

Number of channels:

Performance level:

PL c

PL d

Connection

Connector

Standard M12x1

Cable _____ m

Looped signal

(CAN In & Out)


Standard hybrid connection

Signal and supply
on separate connections

All channels on one connection if possible

One separate connection per channel

All sensors at least IP66/ 67. IP69 on request.

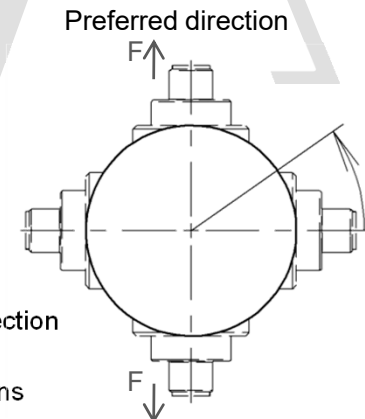

Remarks

@ Send per mail