

General information

Phone _____

New equipment
Retrofit

Quantity _____

Company _____

Contact person _____

E-mail _____

Maritime use

Intended use _____

Measurement range

Nominal load _____

Max. load _____ Breaking load _____

Measurement range _____

Accuracy

Standard 0,5% FS active
1,0% FS passive

Operating temperature

Standard -40...80°C

Explosion protection



2G IIB T4

Ex i (4...20mA_2-wire only)

2G IIC T4

Geometry

Applied force (customer)

Recommended condition

- Roughness Rz 6,3
- Hardness >50 HRC

Pressure plates

With recommended roughness and hardness



include in offer

Indicated height is total height including possible pressure pieces.

Support (customer)

Recommended condition

- Roughness Rz 6,3
- Hardness >50 HRC

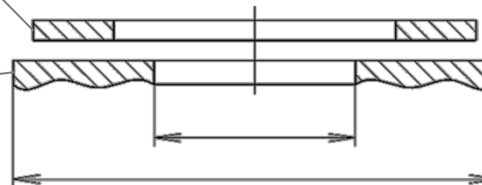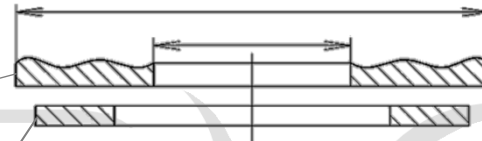

straight
angled

Fields with ?? are
mandatory fields.

Output signal

Output signal:

Number of channels:

Performance level:

PL c

PL d

Connection

Connector

Standard M12x1

Cable _____ m

Looped signal

(CAN In & Out)

Standard hybrid connection

Signal and supply

on separate connections

All channels on one connection if possible

One separate connection per channel

All sensors at least IP66/ 67. IP69 on request.

Remarks

